

AAMCS-PWD-2W-22G-40G-10W-2.9f

AA MCS

22-40GHz

2ways power divider, 10W

FEATURES

- Ultra broadband
- Stripline architecture
- Minimal RF Insertion Loss
- High Reliability, High Isolation




DESCRIPTION

The power/divider combiner offered by AA MCS are designed for both commercial and military applications on range DC-50GHz. Models are available in connectorized SMA, BNC, N, TNC (option) packages, depending on the frequency. All units are designed and manufactured to ensure statistical control of important parameters such as insertion loss and input/output return loss, with power up to more than 1 kWatt.

Electrical Specifications

Bandwidth		22-40GHz
Insertion Loss	Max	1.7 dB
Isolation	Min	12 dB
Amplitude Balance	Max	0.8 dB
Phase Balance	Max	12 Deg
VSWR	Max	1.80:1
Power CW	Min	10 W
Connector		2.92mm f
Operating Temperature	°C	-40 to +85°C
Storage Temperature	°C	-55 to +125°C
Waterproof ness		IP50

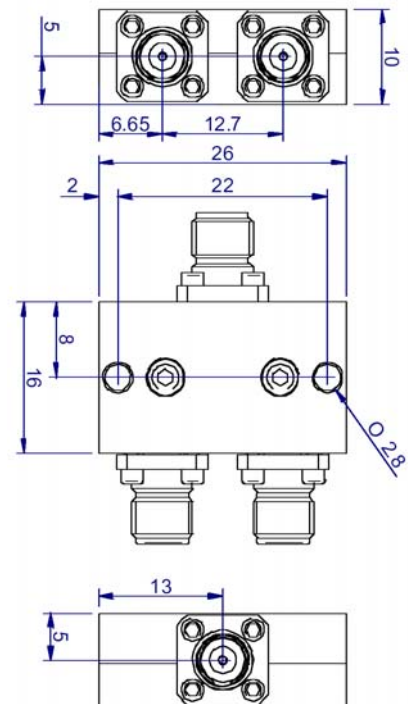

Amplitude & Phase Balance are the ratio between ant 2 output in dB or Deg respectively

Power indicated for load VSWR better than 1.20:1

Size in mm



AA MCS

MICROWAVE COMPONENTS AND SYSTEMS

AA Sa 18, rue Nicolas Appert F-91898 ORSAY - FRANCE

Tel : +33 (0)1 76 91 50 12 – Fax : +33 (0)1 76 91 50 31 – www.aa-mcs.com

11/11

PASSIVE COMPONENTS

Outline is subject to change without prior notice