

AAMCS-PWD-2W-470M-860M-10W-Sf

AA MCS

470-860MHz

2ways power divider, 10W

FEATURES

- UHF Band
- Stripline architecture
- Minimal RF Insertion Loss
- High Reliability, High Isolation
- N Female Connectors available




DESCRIPTION

The power/divider combiner offered by AA MCS are designed for both commercial and military applications on range DC-50GHz. Models are available in connectorized SMA, BNC, N, TNC (option) packages, depending on the frequency. All units are designed and manufactured to ensure statistical control of important parameters such as insertion loss and input/output return loss, with power up to more than 1 kWatt.

Electrical Specifications

Bandwidth		470-860MHz
Insertion Loss	Max	0.5 dB
Isolation	Min	25 dB
Amplitude Balance	Max	0.2 dB
Phase Balance	Max	2 Deg
VSWR	Max	1.20:1
Power CW	Min	10 W
Connector		SMA f
Operating Temperature	°C	-40 to +85°C
Storage Temperature	°C	-55 to +125°C
Waterproof ness		IP50

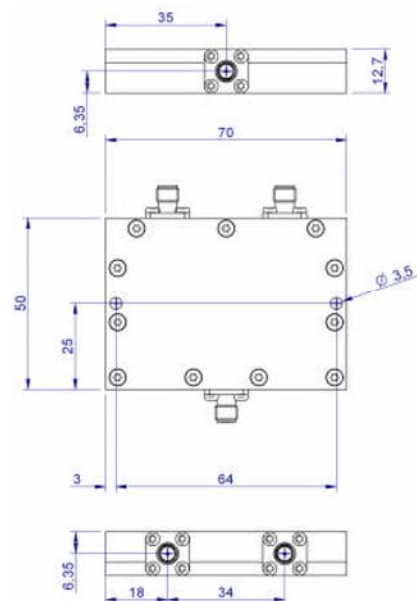

Amplitude & Phase Balance are the ratio between ant 2 output in dB or Deg respectively

Power indicated for load VSWR better than 1.20:1

Size in mm



AA MCS
MICROWAVE COMPONENTS AND SYSTEMS