

4-6GHz

2ways power divider, 30W

FEATURES

- **Narrow band Unit, High Isolation**
- **Stripline architecture**
- **Minimal RF Insertion Loss**
- **High Reliability**
- **N Female Connectors available**




PASSIVE COMPONENTS

DESCRIPTION

The power/divider combiner offered by AA MCS are designed for both commercial and military applications on range DC-50GHz. Models are available in connectorized SMA, BNC, N, TNC (option) packages, depending on the frequency. All units are designed and manufactured to ensure statistical control of important parameters such as insertion loss and input/output return loss, with power up to more than 1 kWatt.

Electrical Specifications

Bandwidth		4-6GHz
Insertion Loss	Max	0.5 dB
Isolation	Min	25 dB
Amplitude Balance	Max	0.15 dB
Phase Balance	Max	2 Deg
VSWR	Max	1.20:1
Power CW	Min	30 W
Connector		SMA f
Operating Temperature	°C	-40 to +85°C
Storage Temperature	°C	-55 to +125°C
Waterproof ness		IP50

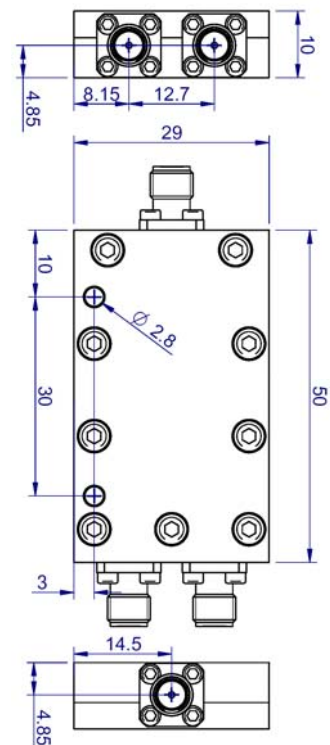

Size in mm

Amplitude & Phase Balance are the ratio between ant 2 output in dB or Deg respectively

Power indicated for load VSWR better than 1.20:1

Outline is subject to change without prior notice



AA MCS
MICROWAVE COMPONENTS AND SYSTEMS